



SL-T0602PTB020-L90 DATA SHEET

Approved By: Checked By: Prepared By:

| Part No. SL-T0602PTB020-L90 Page 1 of 9 |
|---|
|---|






Features

- ♦ Pb free product—RoHS compliant
- ♦ Low power consumption, High efficiency
- ♦ Reliable and rugged
- ♦ Long life solid state reliability
- ♦ Fast response time
- ♦ High photo sensitivity

Package Dimension

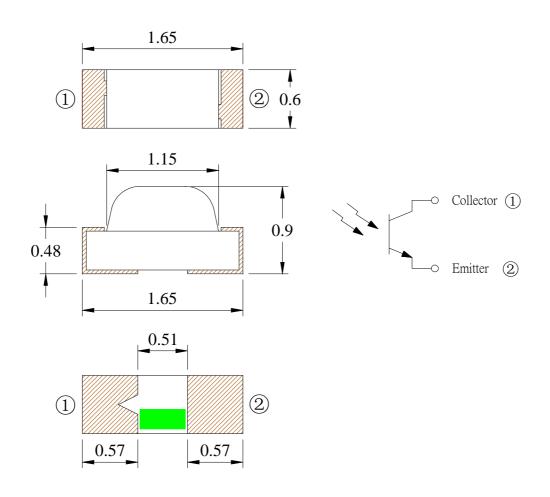

| Part NO. | Chip Material | Lens Color |
|--------------------|---------------|------------|
| SL-T0602PTB020-L90 | Silicon | Black |

Notes:

- 1. All dimensions are in millimeters.
- 2. Tolerance is ± 0.10 mm unless otherwise noted
- 3. Specifications are subject to change without notice.

| Part No. | SL-T0602PTB020-L90 | Page | 2 of 9 |
|----------|--------------------|------|--------|
|----------|--------------------|------|--------|





Absolute Maximum Ratings at Ta=25℃

| Parameter | MAX. | Unit | |
|------------------------------|---------------------------|------|--|
| Power Dissipation | 100 mW | | |
| Collector-Emitter Voltage | 30 V | | |
| Emitter-Collector Voltage | 5 V | | |
| Collector Current | 50 mA | | |
| Moisture Sensitivity Level*1 | 4 | | |
| Operating Temperature | -40°C to + 85°C | | |
| Storage Temperature | -40°C to + 85°C | | |
| IR Reflow Temperature*3 | 260°C for 10 Seconds MAX. | | |

1. Storage:

- (1). Storage requirements before vacuum bag opened: Temperature < 30°C, Humidity < 65%RH;
- (2). Check air leakage and vacuum bag damage before opened. If there is any issue found, check the humidity indicator card immediately after bag opened:
 - a. If color changes on "10% circle" of the humidity indicator card only and not the circles of 20% and above, components can be used without additional handling;
 - b. If color changes on both 10% and 20% circles but not the circles of 30% and above, components must be dehumidified according to the conditions of bullet (5);
 - c. If color changes on 10%, 20%, and 30% circle or above, the product should be returned to the supplier for high temperature dehumidification;
- (3). After bag opened, manual soldering or reflow process must follow the following requirements:
 - a. Complete soldering / reflow within 72 hours;
 - b. Requirements of working environment: Temperature<30°C, Humidity<60%RH;
- (4). If the working condition is outside (3)a or (3)b requirement, the components must be dehumidified according to the conditions of bullet (5);
- (5). Low temperature dehumidification: temperature 60±5 °C, 24 hours;
- (6). Shelf life: 180 days. If it's over 180 days from the production date on the package label, the components must be dehumidified according to the condition of bullet (5). If customer is unable to dehumidify, return components to LIGHT for dehumidification.

2. Cleaning:

Use alcohol-based cleaning solvents such as isopropyl alcohol to clean the LED if necessary.

3. IR Reflow Temperature:

It is the Plate Temperature.

4. Caution in ESD:

Static Electricity and surge damages the LED. It is recommend to use a wrist band or anti-electrostatic glove when handling the LED. All devices, equipment and machinery must be properly grounded.

| No. SL-T0602PTB020-L90 | Page | 3 of 9 |
|------------------------|------|--------|
|------------------------|------|--------|





Electrical Optical Characteristics at Ta=25°C

| Parameter | Symbol | Min. | Тур. | Max. | Unit | Test Condition |
|---|----------------------|------|------|------|------|--|
| Collector-Emitter Breakdown Voltage | BV_{CEO} | 30 | | | V | I _C =0.1mA Ee=0mW/cm2 |
| Emitter-Collector Breakdown Voltage | BV_{ECO} | 5 | | | V | I _E =0.1mA Ee=0mW/cm2 |
| Collector-Emitter Saturation Voltage | V _{CE(SAT)} | | | 0.4 | V | I _C =0.1mA Ee=1mW/cm2 |
| Rise Time | Tr | | 15 | | μs | $V_{CE}=5V$ |
| Fall Time | Tf | | 15 | | μs | $R_L=1K\Omega$ $I_C=1mA$ |
| Collector Dark Current | I_{CEO} | | | 100 | nA | V _{CE} =10V Ee=0mW/cm2 |
| On State Collector Current | $I_{C(ON)}$ | 0.2 | 0.4 | | mA | V_{CE} =5 V Ee=1 m W/cm2 λ p=940 n m |


Note:

- 1. $\theta_{1/2}$ is the off-axis angle at which the $I_{C(ON)}$ is half the axial $I_{C(ON)}$.
- 2. The $I_{C(ON)}$ guarantee should be added $\pm 15\%$ tolerance.





Typical Electrical / Optical Characteristics Curves (25℃ Ambient Temperature Unless Otherwise Noted)

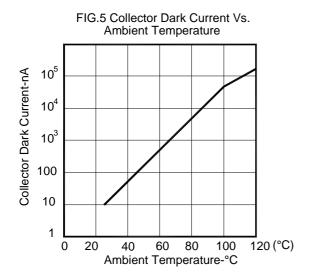

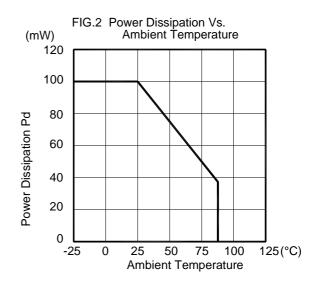


FIG.3 Rise And Fall Time Vs. Load Resistance (ys) 20 Vcc=5V F=100Hz 16 Rise and Fall Time 12 Tf Tr 0 0.2 0.8 1.0 (KΩ) 0.4 0.6 Load Resistance



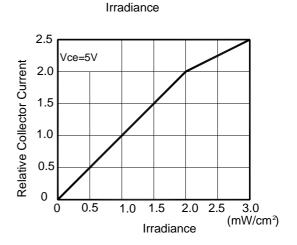


FIG.4 Relative Collector Current Vs.

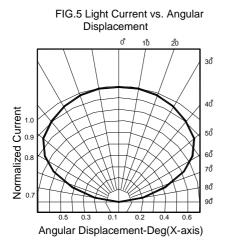



Part No. | SL-T0602PTB020-L90 | Page | 5 of 9







Photo Transistor Diode Specification

- ●Commodity: Photo Transistor diode
 - ●Ic(on) Bin Limits (V_{CE}=5V, Ee=1mW/cm², λp=940nm)

| BIN CODE | Min. (mA) | Max. (mA) | |
|----------|-----------|-----------|--|
| 1 | 0.20 | 0.35 | |
| 2 | 0.35 | 0.5 | |
| 3 | 0.5 | 0.65 | |
| 4 | 0.65 | 0.8 | |
| 5 | 0.8 | 1.0 | |

NOTE: The Ic(on) guarantee should be added $\pm 15\%$ tolerance.

| Part No. | SL-T0602PTB020-L90 | Page | 6 of 9 |
|----------|--------------------|------|--------|
|----------|--------------------|------|--------|





Label Explanation


LIGHT Universal Label (Reel Label)



Customer Defined Label (Aluminum Moisture Proof Bag Label)



Reel Dimensions

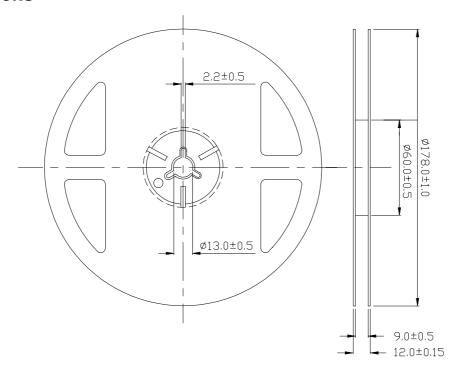


Note: Tolerance unless mentioned is ± 0.2 mm; Unit = mm

| Part No. | SL-T0602PTB020-L90 | Page | 7 of 9 |
|----------|--------------------|------|--------|
|----------|--------------------|------|--------|






Carrier Tape Specifications (Loaded Quantity: 5000pcs/reel)

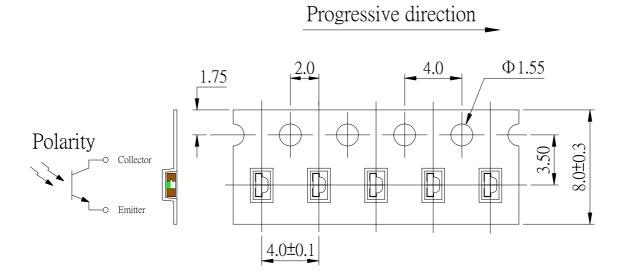

Note: Tolerance unless mentioned is ± 0.1 mm; Unit = mm

Moisture Resistant Packaging

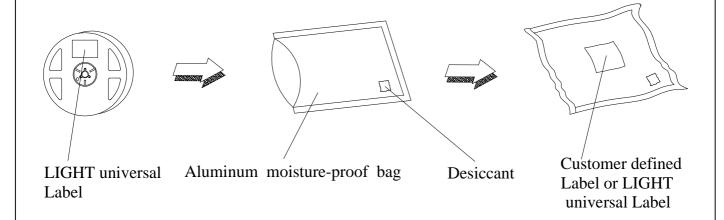


| Part No. | SL-T0602PTB020-L90 | Page | 8 of 9 |
|----------|--------------------|------|--------|
|----------|--------------------|------|--------|





Suggest IR Reflow Condition For Lead Free

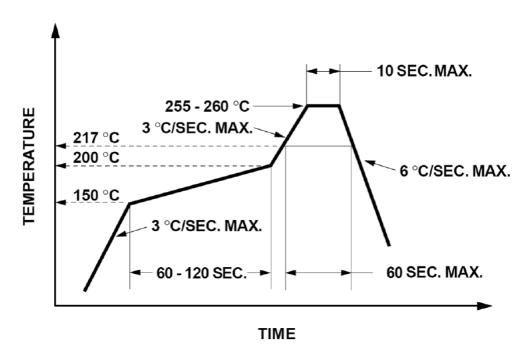


- 1. Reflow soldering should not be done more than two times.
- 2. When soldering, do not put stress on the LEDs during heating.

Soldering iron

- 1. When hand soldering, the temperature of the iron must less than 300°C for 3 seconds.
- 2. The hand solder should be done only once.

Repairing

Repair should not be done after the LEDs have been soldered. When repairing is unavoidable, a double-head soldering iron should be used (as below figure). It should be confirmed beforehand whether the characteristics of LEDs will or will not be damaged by repairing.

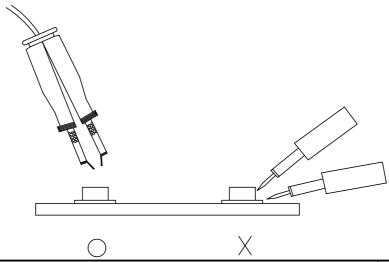

Part No. | SL-T0602PTB020-L90 | Page | 9 of 9