



# SL-T3528PT-940-1.4 PHOTO TRANSISTOR **DATA SHEET**

 SPEC. NO.
 :
 SZ17101702

 DATE
 :
 2020/03/02

 REV.
 :
 A/3

Approved By: Checked By: Prepared By:

Part No. | SL-T3528PT-940-1.4 **Page** 1 of 9






## **Features**

- ◆ Pb free product—RoHS compliant
- ♦ High Photo Sensitivity
- ♦ Reliable and rugged
- ♦ Long life solid state reliability
- ♦ Sensitivity angle: 120°

# Package Dimension

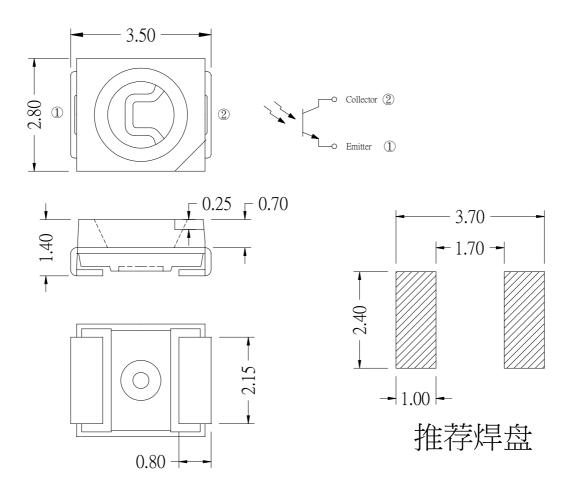

Part NO.	Chip Material	Lens Color
SL-T3528PT-940-1.4	Silicon	Water Clear

### **Notes:**

- 1. All dimensions are in millimeters.
- 2. Tolerance is  $\pm 0.10$ mm unless otherwise noted.
- 3. Specifications are subject to change without notice.

Part No.	SL-T3528PT-940-1.4	Page	2 of 9
----------	--------------------	------	--------





### Absolute Maximum Ratings at Ta=25℃

Parameter	MAX.	Unit	
Power Dissipation	100 mW		
Collector-Emitter Voltage	30	V	
Emitter-Collector Voltage	5	V	
Moisture Sensitivity Level*1	5a		
Operating Temperature	-40°C to + 85°C		
Storage Temperature	-40°C to + 100°C		
IR Reflow Temperature*3	260°C for 10 Seconds MAX.		

### 1. Storage:

- (1). Storage requirements before vacuum bag opened: Temperature<30°C, Humidity<65%RH;
- (2). Check air leakage and vacuum bag damage before opened. If there is any issue found, check the humidity indicator card immediately after bag opened:
  - If color changes on "10% circle" of the humidity indicator card only and not the circles of 20% and above, components can be used without additional handling;
  - b. If color changes on both 10% and 20% circles but not the circles of 30% and above, components must be dehumidified according to the conditions of bullet (5);
  - c. If color changes on 10%, 20%, and 30% circle or above, the product should be returned to the supplier for high temperature dehumidification;
- (3). After bag opened, manual soldering or reflow process must follow the following requirements:
  - a. Complete soldering / reflow within 24 hours;
  - b. Requirements of working environment: Temperature<30°C, Humidity<60%RH;
- (4). If the working condition is outside (3)a or (3)b requirement, the components must be dehumidified according to the conditions of bullet (5);
- (5). Low temperature dehumidification: temperature  $60\pm5^{\circ}$ C, 24 hours;
- (6). Shelf life: 30 days. If it's over 30 days from the production date on the package label, the components must be dehumidified according to the condition of bullet (5). If customer is unable to dehumidify, return components to LIGHT for dehumidification.

#### 2. Cleaning:

Use alcohol-based cleaning solvents such as isopropyl alcohol to clean the LED if necessary.

### 3. IR Reflow Temperature:

It is the Plate Temperature.

#### 4. Caution in ESD:

Static Electricity and surge damages the LED. It is recommend to use a wrist band or anti-electrostatic glove when handling the LED. All devices, equipment and machinery must be properly grounded.

Page 3 of 9	t No.   SL-T3528PT-940-1.4
-------------	----------------------------





## Electrical Optical Characteristics at Ta=25°C

Parameter	Symbol	Min.	Тур.	Max.	Unit	Test Condition
Collector-Emitter Breakdown Voltage	$BV_{CEO}$	30			V	I <sub>C</sub> =0.1mA Ee=0mW/cm2
Emitter-Collector Breakdown Voltage	$BV_{ECO}$	5			V	$I_{E}$ =0.1mA Ee=0mW/cm2
Collector-Emitter Saturation Voltage	V <sub>CE(SAT)</sub>			0.4	V	$I_{C}$ =0.1mA Ee=1mW/cm2
Rise Time	Tr		15	1	μs	V <sub>CE</sub> =5V
Fall Time	Tf		15		μs	$R_L=1K\Omega$ $I_C=1mA$
Collector Dark Current	I <sub>CEO</sub>			100	nA	V <sub>CE</sub> =10V Ee=0mW/cm2
On State Collector Current	$I_{C(ON)}$	1.8	2.6		mA	V <sub>CE</sub> =5V Ee=1mW/cm2 λp=940nm


### **Note:**

- 1.  $2\theta_{1/2}$  is the off-axis angle at which the  $I_{C(ON)}$  is half the axial  $I_{C(ON)}$ .
- 2. The  $I_{C(ON)}$  guarantee should be added  $\pm 15\%$  tolerance.





# Typical Electrical / Optical Characteristics Curves (25℃ Ambient Temperature Unless Otherwise Noted)

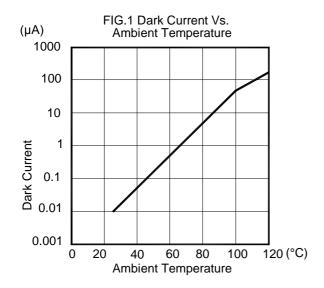

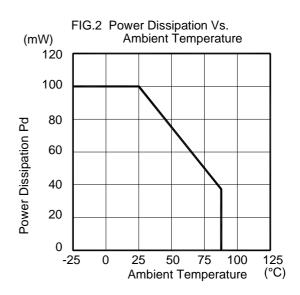


FIG.3 Rise And Fall Time Vs. Load Resistance (µs) 20 Vcc=5V F=100Hz 16 Rise and Fall Time 12 Τf 8 0 0.4 0.6 8.0 1.0 (K∩) Load Resistance



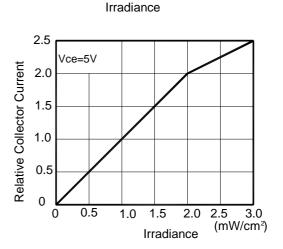


FIG.4 Relative Collector Current Vs.



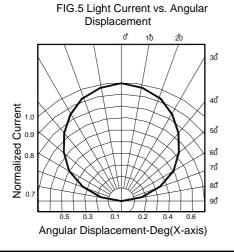

Part No. | SL-T3528PT-940-1.4 | Page | 5 of 9

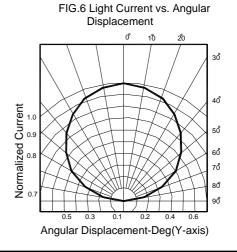





# Photo Transistor Specification

●Commodity: Photo Transistor

●Ic(on) Bin Limits (V<sub>CE</sub>=5V, Ee=1mW/cm<sup>2</sup>, λp=940nm)

BIN CODE	Min.(mA)	Max.(mA)
1	1.8	2.16
2	2.16	2.59
3	2.59	3.1
4	3.1	3.72
5	3.72	4.85

**NOTE**: The Ic(on) guarantee should be added  $\pm 15\%$  tolerance.

Part No.	SL-T3528PT-940-1.4	Page	6 of 9
----------	--------------------	------	--------





# Label Explanation

### LIGHT Universal Label




### **Customer Defined Label**



MODEL NAME/产品型号	QUANTITY/包装数量
BIN./分光等级	PACKING DATE/包装日期
CUSTOMER P/N/客户料号	LOT NO./生产批号
REMARKS/备注	/

## **Reel Dimensions**

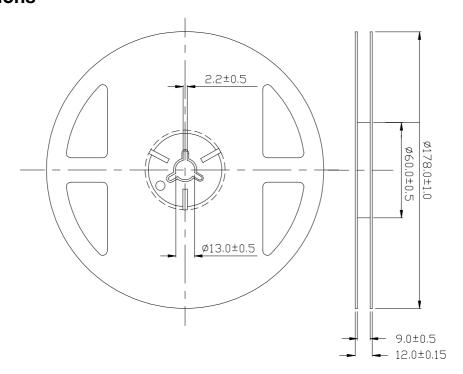


**Note:** Tolerance unless mentioned is  $\pm 0.2$ mm; Unit = mm

Part No.	SL-T3528PT-940-1.4	Page	7 of 9
----------	--------------------	------	--------






## Carrier Tape Specifications (Loaded Quantity: 3000pcs/reel)

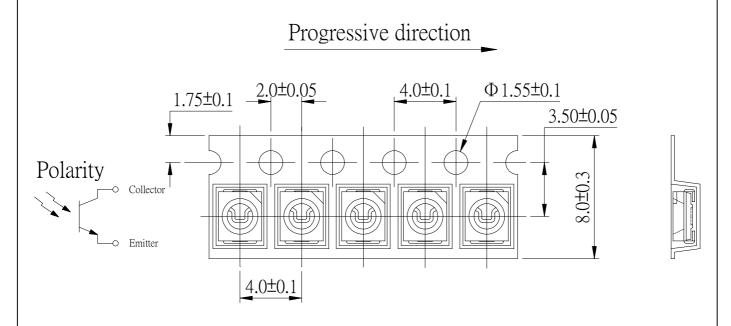

**Note:** Tolerance unless mentioned is  $\pm 0.1$ mm; Unit = mm

## Moisture Resistant Packaging

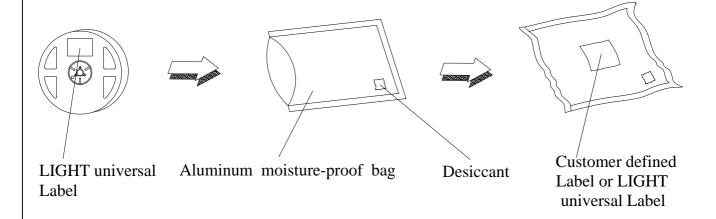


Part No.	SL-T3528PT-940-1.4	Page	8 of 9
----------	--------------------	------	--------





### Suggest IR Reflow Condition For Lead Free

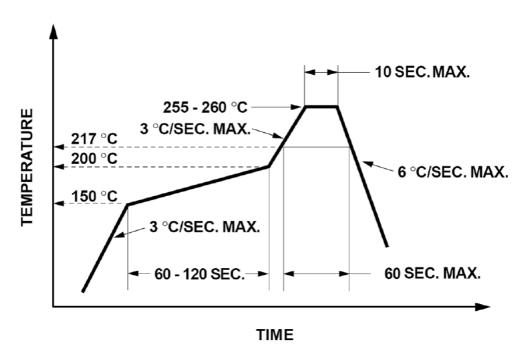


- 1. Reflow soldering should not be done more than two times.
- 2. When soldering, do not put stress on the LEDs during heating.

### Soldering iron

- 1. When hand soldering, the temperature of the iron must less than 300°C for 3 seconds.
- 2. The hand solder should be done only once.

### Repairing

Repair should not be done after the LEDs have been soldered. When repairing is unavoidable, a double-head soldering iron should be used (as below figure). It should be confirmed beforehand whether the characteristics of LEDs will or will not be damaged by repairing.

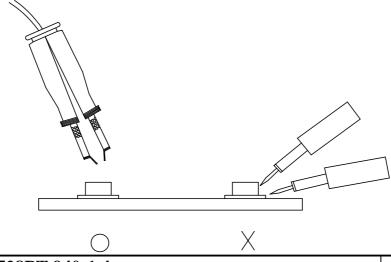

Part No. | SL-T3528PT-940-1.4 | Page | 9 of 9